





Z 22.10 EVO FULL ELECTRIC

72' WORKING HEIGHT

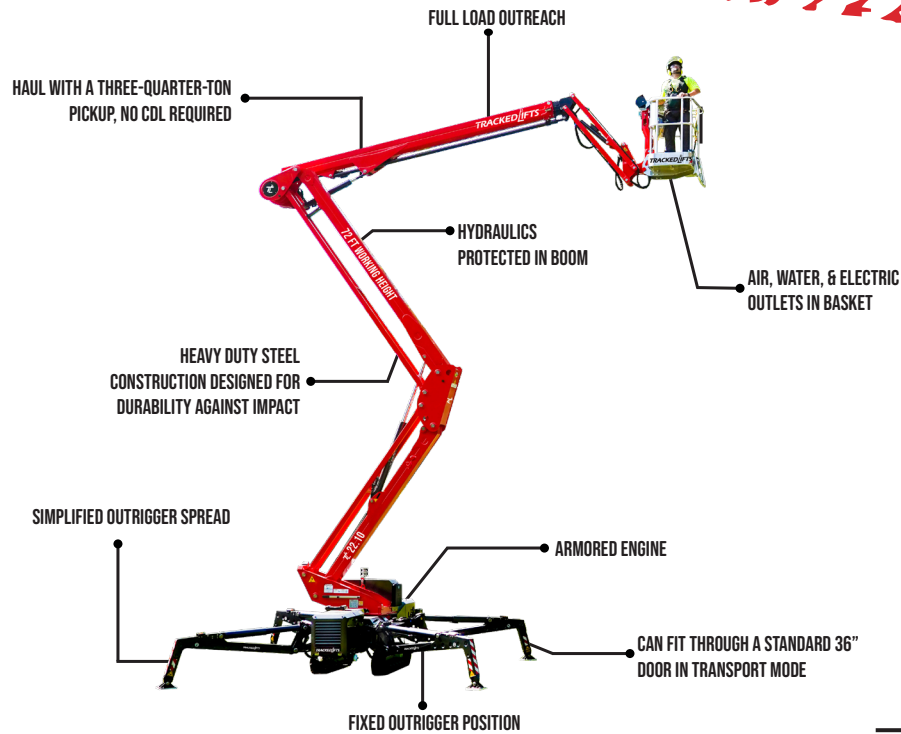

DIAGRAMS

DATA AND DIMENSIONS ARE INDICATIVE AND NOT BINDING

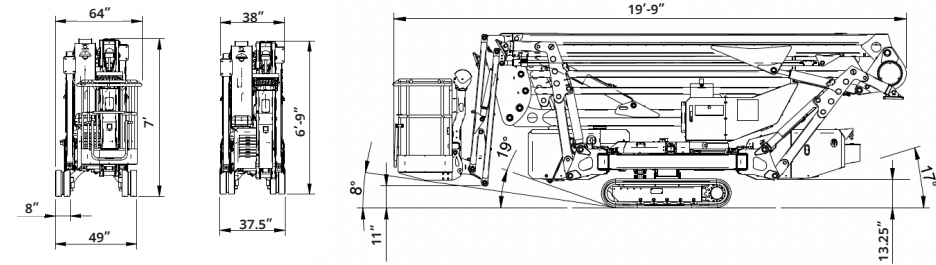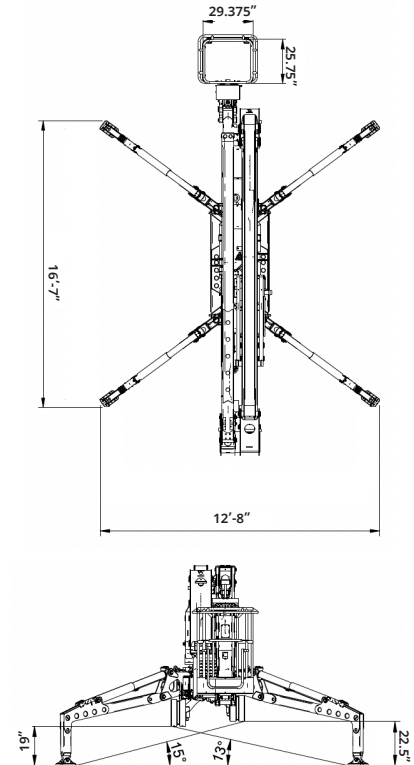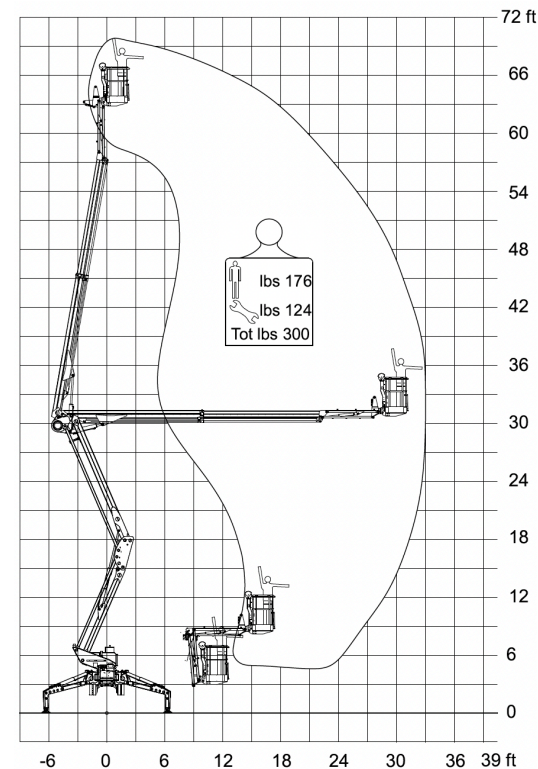

SPECIFICATIONS

Max. working height	72'
Max. outreach	34' unrestricted
Max. basket load	300 lbs
Basket size	2'7" x 2'3" (1-man basket)
Turret rotation	360° non-continuous
Traveling length	19'3" (20'7" with basket)
Traveling height	6'9" narrow mode / 7'1" wide mode
Traveling width	37.5" narrow mode / 49" wide mode
Outrigger Spread	14' x 13' 8"
Battery	12V Emergency Descent System
Power	24V Lithium Ion Battery, 300Ah
Total weight	7,187 lbs
Gradability, max. across slope	31% (17°)
Gradability, max. up and down slope	29% (16°)
Deployment ability on slopes up to	31% (17°)

ADD-ON OPTIONS:

- White Rubber Non-Marking Tracks
- Custom Colors